

## 撕碎机 Shredder

ISO9001:2000 CE SGS



### 性能特点 Performance characteristic

SG-S系列适用于块状浇口原料、橡胶及后壁不良品的撕碎，可选配丝网粉碎，颗粒均匀，噪音低，能耗小，结构紧凑，操作方便，便于清理。采用德国减速马达，经久耐用。

SG-S series is applicable to shredding bulk sprue material, rubber and thick wall defect and the mesh crushing is optional. With feature of uniform granule, low noise, low consumption of energy, compact structure, easy operation and easy to clean. Adopted German reductor motor, structural durability.

注：粉碎最大能力取决于筛网直径。


Note: The crushing capacity depends on the diameter of screen mesh.

型号 Model	粉碎室口径 Chamber Calibre (mm)	破碎能力 Crush Capacity (Kg/H)	动刀片 Rotating Blade (Pcs)	定刀片 Fixed Blade (Pcs)	电机功率 Motor (Kw)	外型尺寸 External Dimensions (L×W×H)	重量 Weight (kg)
SG-5641	410×560	350-650	27	2×2	11	1165×885×1930	1120kg

产品规格若有变更，恕不另行通知。We reserve the right to change specifications without prior notice.

## 称重拌料混合机 Gravimetric Dosing and Mixing Unit

**SML** 斯曼尔  
www.nb-sml.com  
sales@nb-sml.com

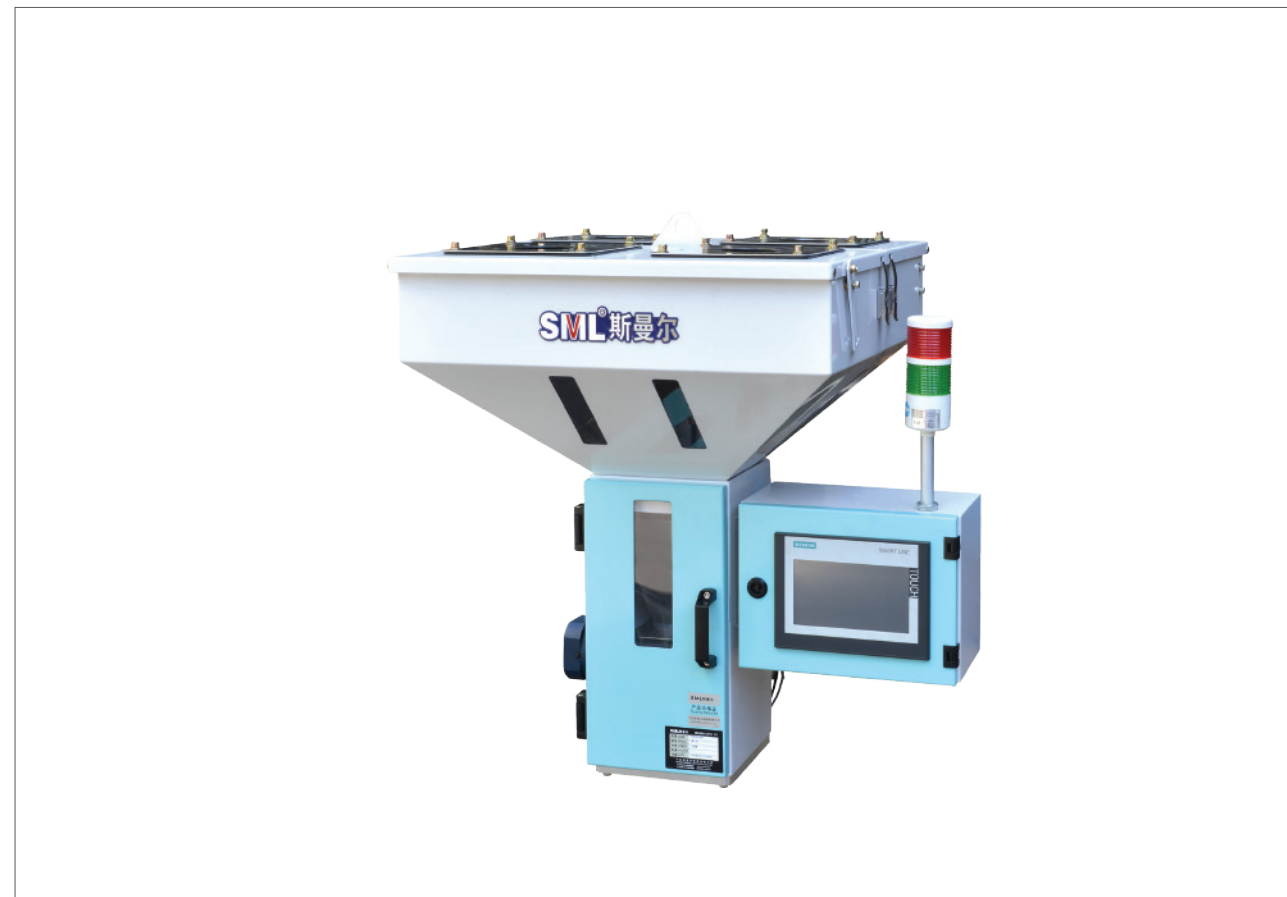

### 性能特点 Performance characteristic

SWH系列适用于塑胶成型中需要多种原料按重量比例作精准称重拌料的场合，精度范围控制在±0.5%；采用日本先进的系统模块，具有自动校准、程序补偿、记录报警、配方存储等功能；安装方式分为地面型和机台型。

可选配移动底座+储料桶、气动放料阀、阻旋式料位计、吸料盒。

SWH series is applicable to the situation that some kinds of material need accurate weighing and mixing by proportional when plastic injection, precision control within ±0.5%; Use of Japanese advanced system module, with the function of automatic calibration, program compensation, alarm recording, formula storage, etc. Two type Installation: on ground type and on machine type.

Movable frame, material hopper, pneumatic discharge valve, damped rotation type level indicator and suction box are optional.

型号 Model	计量料斗数量 Number of dosing hopper	计量料斗容量(L) Volume of dosing hopper	最大产能 The max. capacity	色母粒占添加剂比例 Dosing range additive percentage	拌料马达(W) Blender motor	压缩空气 kg/cm <sup>2</sup> Compressed air	电源 Power
SWH-40	4	8	40	0.5-10	200	5-6	230V / 50HZ
SWH-60	4	12	70	0.5-10	200	5-6	230V / 50HZ
SWH-100	4	18	120	0.5-10	200	5-6	230V / 50HZ
SWH-300	4	25	350	0.5-10	200	5-6	230V / 50HZ
SWH-600	4	40	650	0.5-10	370	5-6	230V / 50HZ

产品规格若有变更，恕不另行通知。We reserve the right to change specifications without prior notice.