

注塑用机械手  
TAKE-OUT ROBOT

**EUW-80**  
**EUW-80s**




注塑机锁模力 Injection Press Range  
**100 ~ 220ton**

标准功能 STANDARD FUNCTION

- 装箱动作 (各轴256点)  
Packaging motion (Max. 256 points)
- 自由装箱点 (115点 × 2处)  
Free packaging motion (115points × 2stage)
- 取出侧前进姿势控制  
Forward and rotate at removing side
- 走行途中姿势  
Posture control during traverse
- 落下测下降途中姿势  
Posture midway descent at release side
- 顶针连动  
Ejector link
- 不良品排出回路  
Defective product reject circuit
- 初期不良品排出回路  
Initial defective product reject circuit
- 取向下降待机  
Delayed arm descent
- 胶口途中开放 (去程, 返程)  
Midway runner release (Move, Revert)
- 水口模内开放  
Runner release within mold
- 吸着确认单元 (2回路)  
Additional vacuum sensing unit (2 circuit)
- 横走行待机  
Delayed traverse
- 滑移取出回路  
Undercut extract circuit
- 输送带启动信号  
Start signal of conveyor
- 内部存储记忆 (最大100种类型)  
Internal memory (for Max 100 molds)
- 设定值锁定功能  
Lock function of setting value
- 固定可动切换  
Extraction from fixed mold
- 2国语言切换 (中文, 英文)  
Two language exchange (Chinese/English)

型式 MODEL	单位 UNIT	EUW-80	EUW-80s
电源 Power Source	V	AC 200~220 ± 10% 50/60Hz	
最大消费电力 Max Power Consumption	KW	2	2.8
使用气压 Air Pressure	Mpa	0.5 ~ 0.7	
空气消费量 Air Consumption	NI/cycle	2.9	
驱动方式 Drive System	---	伺服马达 / AC Servo Motor	
姿势 (气缸) Posture (Air Cylinder)	---	90°固定 / 90°Fixed	
■ 气缸推力 (气压0.49MPa时) Air Cylinder Driving Force (Air Pressure at 0.49MPa)			
最大可搬重量 Max.Load	Kg	6 【含夹具重量 / Incl Chuck Weight】	
姿势力矩 Posture Torque	N · m	11.7	
■ 行程 Stroke			
主臂上下 Main-arm Vertical	mm	900/1000	900/1000
副臂上下 Sub-arm Vertical	mm	---	950/1050
前后(主臂,副臂) Crosswise (M,S)	mm	主臂/M 245 ~ 800	副臂/S 385 ~ 800 210 ~ 630
走行 Traverse	mm	1400/1600	
■ 本体重量 Net Weight			
本体 Main Body	Kg	270	298
操作盒 Pendant	Kg	1.6	

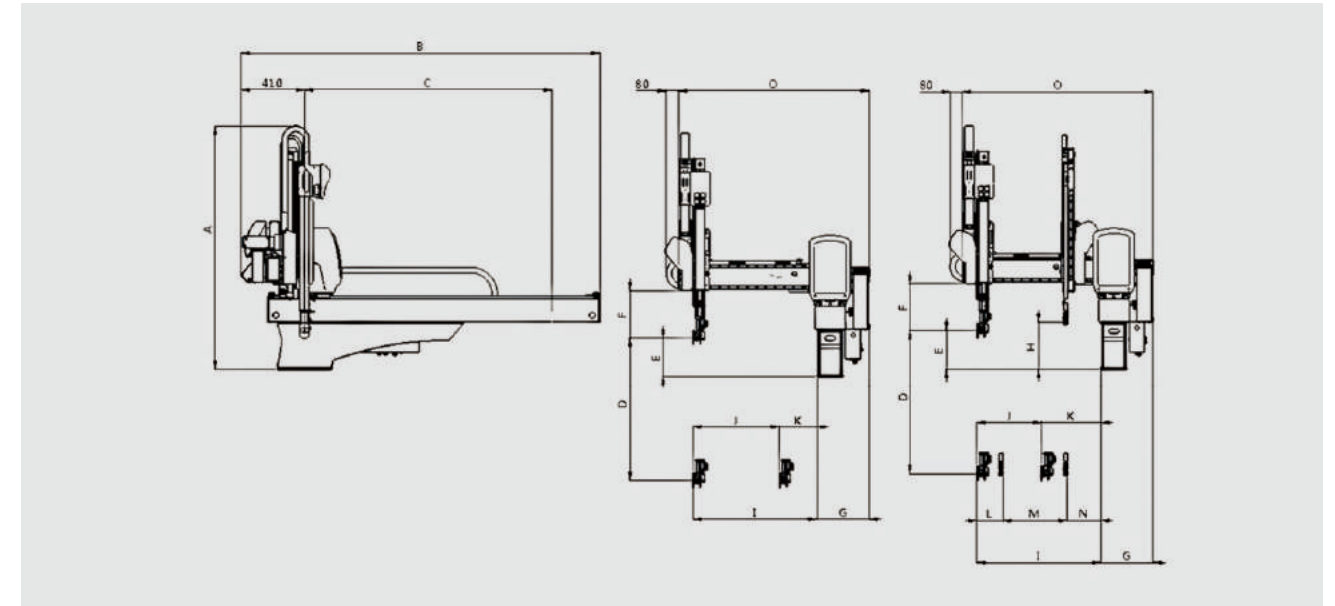

外形尺寸 OUTER DIMENSIONS

EUW-80 EUW-80s

外形尺寸 OUTER DIMENSIONS	EUW-80	EUW-80s
A 总高 Overall height	1510 (1560) mm	
B 总长 Overall length	2125 (2325) mm	
C 走行行程 Traverse stroke	1400/1600 mm	
D 主臂上下行程 Main-arm vertical stroke	900 (1000) mm	
E 主臂上下待机 Main-arm vertical standby	250 mm	
F 夹具安装有效空间 Bottom of crosswise to chuck mount position	300 mm	
G 基座里侧面-箱体末端 Base side face-Box end	340 mm	
H 副臂上下待机 Sub-arm Vertical standby	---	300 mm
I 主臂前进最大值 Main-arm reach max	800 mm	
J 主臂前进最大行程 Main-arm crosswise stroke max	555 mm	415 mm
K 主臂前后待机最小值 Main-arm crosswise standby min	245 mm	385 mm
L 主副臂接近最小值 Main/Sub-arm proximity min	---	170 mm
M 副臂前进最大行程 Sub-arm crosswise stroke max	---	415 mm
N 副臂前后待机最小值 Sub-arm crosswise standby min	---	215 mm
O 前后臂末端-箱体末端 Crosswise arm end-Box end	1235 mm	

- 当尺寸C是1400mm时, 尺寸B为2125mm  
• when dimension C is 1400mm, B is 2125mm
- 当尺寸D是900mm时, 尺寸A为1510mm  
• when dimension D is 900mm, A is 1510mm

- 当尺寸C是1600mm时, 尺寸B为2325mm  
• when dimension C is 1600mm, B is 2325mm
- 当尺寸D是1000mm时, 尺寸A为1560mm  
• when dimension D is 1000mm, A is 1560mm

选项功能 OPTION FUNCTION

- ◆ 夹具内剪刀回路  
Air nipper in chuck circuit
- ◆ NT剪切·可动侧  
NT gate cutting on crossmember of moving
- ◆ 吸着确认4回路  
Additional vacuum sensing unit (4 circuits)
- ◆ 制品夹取4回路  
Product gripping 4 circuits
- ◆ 上升途中闭模  
Mold close during ascend
- ◆ 回转单元  
Rotation unit
- ◆ 顶针后退连动  
Ejector return link
- ◆ 欧规12  
EUROMAP12
- ◆ 欧规67  
EUROMAP 67